



IC-F1000 Series
IC-F2000 Series

VHF AND UHF TRANSCEIVERS

Little Radio, Big Sound! Class Leading 1500 mW Audio and Full of Great Features

The IC-F1000/F2000 series provides class leading 1500 mW loud and clear audio with Icom custom high power handling capacity speaker. It offers a compact, waterproof durable design and is full of great features such as motion/stationary detection sensor, man down, voice scrambler and voice announcement functions. The radio is ideal for business and industry users who require economical value and reliability in a radio.

Icom custom high power handling capacity speaker for 1500 mW powerful audio

Compact, waterproof durable design (IP67 and MIL-STD-810-G)

Enhanced emergency safety with built-in motion/stationary detection sensor

128 channel capacity with eight zones (Simple type and ten-key type)

Built-in 2-Tone, 5-Tone, CTCSS and DTCS

MDC and BIIS compatible

16-code inversion voice scrambler

Man down and lone worker functions

Channel announcement

Up to 14 hours of operating time with supplied BP-279 battery

5 W (VHF), 4 W (UHF) RF output power



IC-F1000T

IC-F2000S

IC-F1000

FEATURES

IC-F1000 • IC-F2000 Series

General Features

- 136–174, 335–380, 400–470, 450–512, 450–520 MHz versions
- 1500 mW large volume audio from Icom custom speaker
- Improved sound clarity
- Compact (52.2 × 111.8 × 24.5 mm; 2.1 × 4.4 × 1.0 in) and lightweight (240 g; 8.5 oz with BP-279)
- IP67 waterproof and dust-tight protection
- Tested to 12 categories of MIL-STD-810-G environmental tests
- DTMF autodial memories
- 16-position rotary selector and ON/OFF volume knob
- “Shift key” function increases number of programmable key assignments
- Up to 14 hours of operating time with supplied BP-279 battery pack
- Eight character alphanumeric display (Ten-keypad/simple-keypad versions)
- Three color LED



1500 mW powerful audio



Icom custom high power handling capacity speaker



Waterproof for 30 minutes at one meter

Signaling Functions

- CTCSS and DTCS tone
- 2-Tone and 5-Tone
- MDC PTT ID, Emergency (TX/RX), Radio Check (RX), Stun (RX), Revive (RX)
Up to 100 ID numbers and names can be saved to show the alias name, instead of the ID number
- BIIS PTT ID transmission

Safety and Security

- 16-code inversion voice scrambler
- Radio Stun/Revive/Kill commands (2-Tone and 5-Tone, RX only)
- Radio Stun/Revive commands (MDC, RX only)
- Auto TX function (2-Tone and 5-Tone)
- MDC emergency call with open microphone function (MDC, RX only)
- Man down function
- Lone worker function
- Motion and stationary detection function
- Surveillance function temporarily turns OFF the beep and LED indicator
- Power ON password (for the simple type and 10-key type)
- Emergency key for emergency call

Scan Functions

- Priority scan monitors one or two priority channels while scanning non-priority channels
- Mode dependent scan automatically changes the scan list according to the operating channel
- Power ON scan function
- Talk back timer

Voice/Audio Functions

- Channel announcement function
- VOX function for hands-free operation
- Audio compander
- Siren sound for security alarm

SPECIFICATIONS

IC-F1000•IC-F2000 Series

		IC-F1000T/S	IC-F1000	IC-F2000T/S	IC-F2000
GENERAL					
Frequency coverage* (* Varies according to version)		136–174 MHz		400–470 MHz (ALL) 450–512 MHz (USA) 450–520 MHz (EXP)	335–380 MHz (EXP) 400–470 MHz (ALL) 450–512 MHz (USA) 450–520 MHz (EXP)
Number of channels		128 channels/ 8 zones	16 channels	128 channels/ 8 zones	16 channels
Type of emission* (* Depending on version)		16K0F3E*/11K0F3E (USA/EXP) 16K0F3E/14K0F3E/8K50F3E (EUR)			
Power supply requirement		7.5 V DC nominal			
Current drain (approx.)	Tx	1.3 A			
	Rx	500 mA /77 mA (Max. audio (internal SP)/Standby)		500 mA /80 mA (Max. audio (internal SP)/Standby)	
Antenna impedance		50 Ω			
Operating temperature range		–30°C to +60°C; –22°F to +140°F (Radio specification) (USA/EXP) –25°C to +55°C (Radio specification) (EUR)			
Dimensions (W × H × D; Projections not included)		52.2 × 111.8 × 24.5 mm; 2.1 × 4.4 × 1.0 in (With BP-279)			
Weight (approx.)		240 g; 8.5 oz (With BP-279)			
TRANSMITTER					
Output power (Hi, L2, L1)		5 W, 2 W, 1 W		4 W, 2 W, 1 W	
Maximum frequency deviation		± 5.0 kHz (@ 25 kHz), ±4.0 kHz (@ 20 kHz), ±2.5 kHz (@ 12.5 kHz)			
Spurious emissions		70 dB minimum (USA/EXP) 0.25 μW (≤ 1 GHz), 1.0 μW (> 1 GHz) (EUR)			
Frequency stability		±2.5 ppm			
Audio harmonic distortion		1.0% typical (@ 25/20 kHz), 1.5% typical (@ 12.5 kHz) (at AF 1 kHz 40% deviation)			
FM Hum and Noise (without CCITT filter)		46 dB typical (@ 25 kHz), 40 dB typical (@ 12.5 kHz) (USA/EXP)			
Residual modulations (with CCITT filter)		50 dB typical (@ 25 kHz), 47 dB typical (@ 20 kHz), 44 dB typical (@ 12.5 kHz) (EUR)		53 dB typical (@ 25 kHz), 51 dB typical (@ 20 kHz), 48 dB typical (@ 12.5 kHz) (EUR)	
External microphone connector		3-conductor 2.5 (d) mm (1/10)/2.2 kΩ			
RECEIVER					
Sensitivity	(at 12 dB SINAD)	0.25 μV typical			
	(at 20 dB SINAD)	–4 dBμV typical emf			
Adjacent channel selectivity		76 dB typical (@ 25 kHz), 53 dB typical (@ 12.5 kHz) (TIA-603D) 78 dB typical (@ 25 kHz), 71 dB typical (@ 12.5 kHz) (TIA-603A)		73 dB typical (@ 25 kHz), 56 dB typical (@ 12.5 kHz) (TIA-603D) 74 dB typical (@ 25 kHz), 64 dB typical (@ 12.5 kHz) (TIA-603A)	
		76 dB typ. (@ 25 kHz), 72 dB typ. (@ 20 kHz), 53 dB typ. (@ 12.5 kHz) (EUR)		73 dB typ. (@ 25 kHz), 73 dB typ. (@ 20 kHz), 56 dB typ. (@ 12.5 kHz) (EUR)	
Spurious response rejection		70 dB minimum			
Intermodulation rejection		74 dB typical (USA/EXP) 68 dB typical (EUR)		73 dB typical (USA/EXP) 67 dB typical (EUR)	
Hum and noise	(With CCITT filter)	51 dB typical (@ 25 kHz), 45 dB typical (@ 12.5 kHz) (USA/EXP)		49 dB typical (@ 25 kHz), 43 dB typical (@ 12.5 kHz) (USA/EXP)	
	(Without CCITT filter)	52 dB typical (@ 25 kHz), 49 dB typical (@ 20 kHz), 46 dB typical (@ 12.5 kHz) (EUR)		52 dB typical (@ 25 kHz), 50 dB typical (@ 20 kHz), 47 dB typical (@ 12.5 kHz) (EUR)	
AF output power (at 5% distortion)	Internal SP	1500 mW typical (With 8 Ω load)			
	External SP	400 mW typical (With 8 Ω load)			
External speaker connector		2-conductor 3.5 (d) mm (1/8)/8 Ω			

All stated specifications are subject to change without notice or obligation. Measurements made in accordance with TIA-603 (USA/EXP) or EN 300-086 (EUR).

*¹ 25 kHz bandwidth is no longer available for FCC Part 90 licensees for USA versions.

Applicable U.S. Military Specifications & IP Rating

Standard	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I-C
Solar Radiation	505.5	I
Rain Blowing/Drip	506.5	I, III
Humidity	507.5	II
Salt Fog	509.5	–
Dust Blowing	510.5	I
Immersion	512.5	I
Vibration	514.6	I
Shock	516.6	I, IV

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

Ingress Protection Standard	
Dust & Water	IP67 (Dust-tight and waterproof protection)

Battery Life

Battery pack	Type	Capacity	Operating time*
BP-278	Li-ion 7.2 V	1190 mAh (typ.), 1130 mAh (min.)	Up to 10 hours
BP-279	Li-ion 7.2 V	1570 mAh (typ.), 1485 mAh (min.)	Up to 14 hours
BP-280	Li-ion 7.2 V	2400 mAh (typ.), 2280 mAh (min.)	Up to 20 hours

* TX: RX: standby = 5:5:90. Power save function ON.

Supplied accessories: (May differ or not supplied, depending on version)

- Battery pack, BP-279 • Desktop charger, BC-213* • Belt clip, MB-133
- AC adapter, BC-123SA/SE/SUK or BC-242* • Antenna



The "3D GENUINE Icom label" is attached to the rear chassis under the battery. Check the Icom website for details: <http://www.icom.co.jp/world/genuine-info/>

OPTIONS

IC-F1000 • IC-F2000 Series

■ BATTERY PACKS

BP-278: 1190 mAh (typ.), 1130 mAh (min.) rechargeable Li-ion battery.

BP-279: 1570 mAh (typ.), 1485 mAh (min.) rechargeable Li-ion battery.

BP-280: 2400 mAh (typ.), 2280 mAh (min.) rechargeable Li-ion battery.



BP-278

BP-279

BP-280

■ BATTERY CHARGERS

BC-213: Desktop charger.

Charges the BP-278, BP-279 or BP-280. Charges the BP-279 in 2.5 hours (approximate).

+ **BC-123SA/SE/SUK/SV** or **BC-242:** AC adapter.

BC-214: Multi-charger.

Charges up to six radios and/or batteries at the same time.

+ **BC-157S:** AC adapter.

* AD-130 charger adapter is supplied with the BC-214, depending on version.



BC-213

BC-123SA

BC-214

BC-157S

■ POWER SUPPLY CABLES AND CHARGER BRACKET

CP-23L: Vehicle charger cable for use with the BC-213.

OPC-656: DC power cable for use with the BC-214.

MB-130: Charger bracket for use with the BC-213.



CP-23L

OPC-656

MB-130

■ SPEAKER-MICROPHONES

HM-168LWP: Waterproof speaker microphone with a waterproof connector. IP67 protection.

HM-158LA: Compact speaker microphone with 3.5 mm earphone jack.

HM-159LA: Speaker microphone with 3.5 mm earphone jack.



HM-168LWP

HM-158LA

HM-159LA

■ EARPHONE-MICROPHONES

HM-153LA: Durable lapel microphone with earphone.

HM-166LA: Light weight lapel microphone with earphone.



HM-153LA

HM-166LA

■ HEADSETS, PTT SWITCH CABLE & PLUG ADAPTER

HS-94LWP: Earphone-headset with a waterproof connector.

HS-95LWP: Behind-the-head headset with a waterproof connector.

HS-94: Earphone-headset. (Use with either the VS-4LA or OPC-2004LA)

HS-95: Behind-the-head headset. (Use with either the VS-4LA or OPC-2004LA)

HS-97: Throat microphone. (Use with either the VS-4LA or OPC-2004LA)

VS-4LA: PTT switch cable for manual PTT operation.

(For use with either the HS-94, HS-95 or HS-97)

OPC-2004LA: Plug adapter cable for VOX operation.

(For use with either the HS-94, HS-95 or HS-97)



HS-94LWP

HS-95LWP

HS-97

VS-4LA

OPC-2004LA

■ BELT CLIP

MB-133: Alligator belt clip. Same as supplied.



MB-133

■ SOFTWARE AND CABLE

CS-F2000: Programming software.

OPC-478UC: USB type radio programming cable.

■ ANTENNAS

FA-SC25V: 136–150 MHz

FA-SC28V: 148–162 MHz

FA-SC29V: 160–174 MHz


FA-SC55V: 150–174 MHz

FA-SC25U: 400–430 MHz

FA-SC57U: 430–470 MHz

FA-SC72U: 470–520 MHz

FA-SC02U: 330–380 MHz

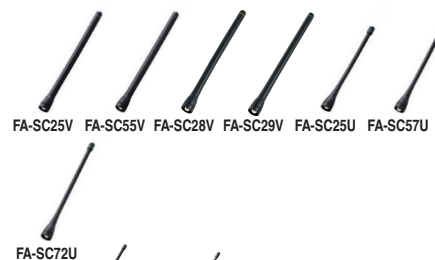

FA-SC25V

FA-SC55V

FA-SC28V

FA-SC29V

FA-SC25U

FA-SC57U

FA-SC72U

■ HIGH GAIN ANTENNAS

FA-SC62V: 150–160 MHz

FA-SC63V: 155–165 MHz



FA-SC62V

FA-SC63V

■ STUBBY ANTENNAS

FA-SC26VS: 136–144 MHz

FA-SC27VS: 142–150 MHz

FA-SC56VS: 150–162 MHz

FA-SC57VS: 160–174 MHz

FA-SC26US: 400–450 MHz

FA-SC73US: 450–490 MHz



FA-SC26VS

FA-SC27VS

FA-SC56VS

FA-SC57VS

FA-SC26US

FA-SC73US

■ CUT-TYPE ANTENNAS

FA-SC61VC: 136–174 MHz

FA-SC61UC: 380–520 MHz



FA-SC61VC

FA-SC61UC

Some options may not be available in some countries. Please ask your dealer for details.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. All other trademarks are the properties of their respective holders.

Icom Inc. 1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.
www.icomamerica.com

Icom (Europe) GmbH
www.icomeurope.com

Icom (Australia) Pty. Ltd.
www.icom.net.au

Your local distributor/dealer:

Icom Canada
www.icomcanada.com

Icom Spain S.L.
www.icomspain.com

Shanghai Icom Ltd.
www.bjicom.com

Icom Brazil
E-mail: sales@icombrasil.com

Icom (UK) Ltd.
www.icomuk.co.uk

Icom France s.a.s.
www.icom-france.com